

Thermax® Irreversible Temperature Recording Strips

Product Description:

A series of temperature test labels that will permanently record the highest temperature reached by the label.


What They Are:

These self-adhesive labels consist of a series of temperature-sensitive elements sealed between heat-resistant substrates with transparent windows. Each element changes color distinctly as its rated temperature is exceeded. The changes are irreversible, providing a temperature history of the surface being monitored. The labels will not de-laminate when removed for reference and can be attached to an inspection report to serve as a permanent record.

How The Labels Work:

The temperature-sensitive elements are phase-change indicators which use the sharply defined melting points of a series of specially purified organic chemicals to give the unique, high precision, color change effects. Each temperature element uses a different chemical compound and is made separately by applying a coating containing the chemical to a special absorptive paper substrate. When the rated temperature is exceeded, the chemical melts and is absorbed by the substrate, causing a permanent color change. Up to ten elements can be combined together on a single label.

Label Construction	
Component	Thickness
Print Foil	>10μ
Polyester Film (171°C and below)	50μ
Polyethylene Naphthalate Film (172°C to 210°C)	50μ
Polyimide Film (211°C and above)	50μ
Adhesive Type Acrylic (171°C and below)	125μ
Adhesive Type Modified Acrylic (172°C to 260°C)	50μ
Adhesive with No Carrier Pure Acrylic (261°C +)	100μ
Black Coated Paper & Backing	>150μ
Release Liner	75μ

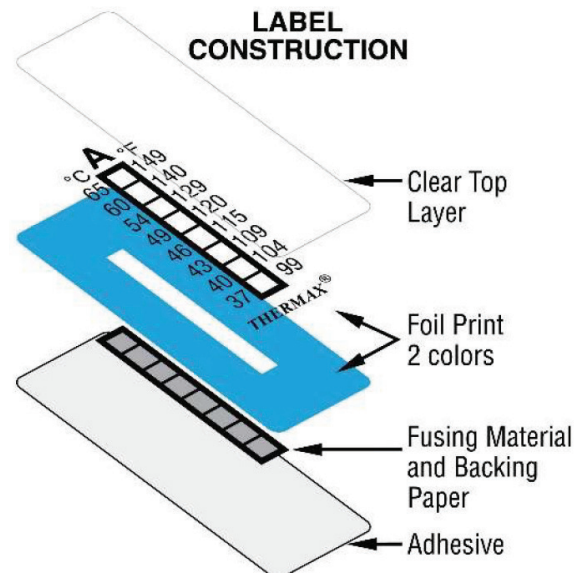

Above values are general guides for illustration purposes only.

Thermax® Irreversible Temperature Recording Strips

Physical Properties				
	Low Temperatures (171°C and below)	Mid Temperatures (172°C to 210°C)	High Temperatures (211°C to 260°C)	Very High Temperatures (261°C and higher)
Adhesive Type	Acrylic	Modified Acrylic	Modified Acrylic	Pure Acrylic
Carrier	Polyester	Tissue	Tissue	None
Covering Film	Polyester	Polyethylene Naphthalate	Polyimide	Polyimide
Response Time	2 to 5 seconds	2 to 5 seconds	2 to 5 seconds	2 to 5 seconds
Color Change Material	Non-toxic, white crystalline solid on a black absorbent backing, adhered with acrylic adhesive			
Tolerance	Less than 100°C: +/- 1°C 100°C to 154°C: +/- 1.5°C Greater than 160°C to 280°C: +/- 1°C + 1%			
Guarantee	Temperatures from 29 – 34°C / 84 – 93°F = 6 months guarantee, providing they are stored in a refrigerator inside a sealed bag. Temperatures from 37 – 49°C / 99 – 120°F = 12 months guarantee, providing they are stored in a refrigerator inside a sealed bag. Temperatures from 50 – 290°C / 130 – 554°F = 24 months guarantee, store at room temperature & Humidity (i.e. 16°C/60°F-27°C/80°F & 40-60% relative humidity)			

Application Data:

Peel temperature-indicating label from backing paper. Apply to dust & grease free surface. Indicators change from white/grey to black when the temperature rating has been achieved. Note that labels with a polyimide film will appear orange to start. These products are made to the highest standards however they are not suitable for all applications. Please discuss any specific needs with our team.

Custom Products:

In addition to the standard Thermax® labels, which cover the temperature range of 29- 290°C, a full custom manufacturing service is available, and products can be manufactured to meet customers' precise requirements of, for example, size, shape, color, temperature range, number of temperature elements, graphic printing (logos etc.). Please ask for details.